
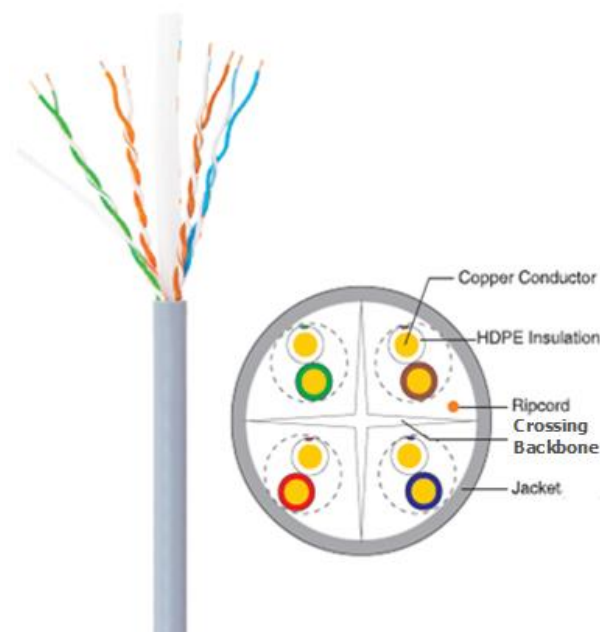


UTP Category 6 Cables

Content of Data Sheet					
Product model	UV-UTP6-300-BC24AWG-DCA-B-W				
Product specification	Cat6. U/UTP. 4×2×0.53mm				
CPR Dca					
Test Standard	ISO/IEC11801 ED.2				
	ANSI/TIA-568-C.2				
Conductor	Material	OFC			
	AWG	24			
	Nom.O.D.(mm)	0.53±0.005 mm			
	DC resistance	≤95Ω/km			
Insulation	Material	HDPE			
	Thinkness	0.21+0.03mm			
	Diameter	0.95±0.05 mm			
	Color	Blue/White- Blue	Green/White-Green		
		Orange /White-Orange	Brown/White-Brown		
	Pitch	Twist Pitch	≤25mm		
Cable Pitch		≤120mm			
Sheath	Material	LSZH			
	Fire Resistance	CPR Dca			
	External O.D.	5.7±0.3 mm			
	Color	White			
	Tensile strength	>10 Mpa			
	Thickness	0.55±0.15 mm			
Surface Printing	Letter height	3.0±0.3 mm			
	Color	Black			
	Print error & Space	1±0.005 m			
Packing	Packing	Box			
	Once packing dimension	380mm*220mm*380mm			

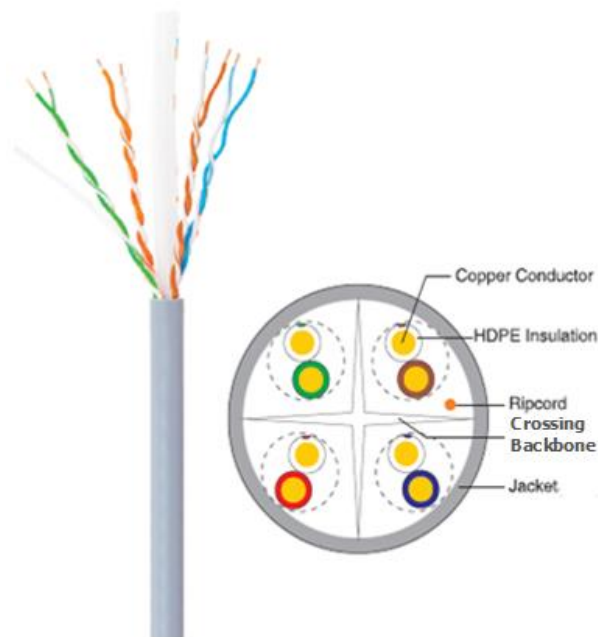

length	305±1 m		
Rip-cord	Yes	Crossing Backbone	Yes
Ambient temperature	-20°C ~ 75°C		

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.