
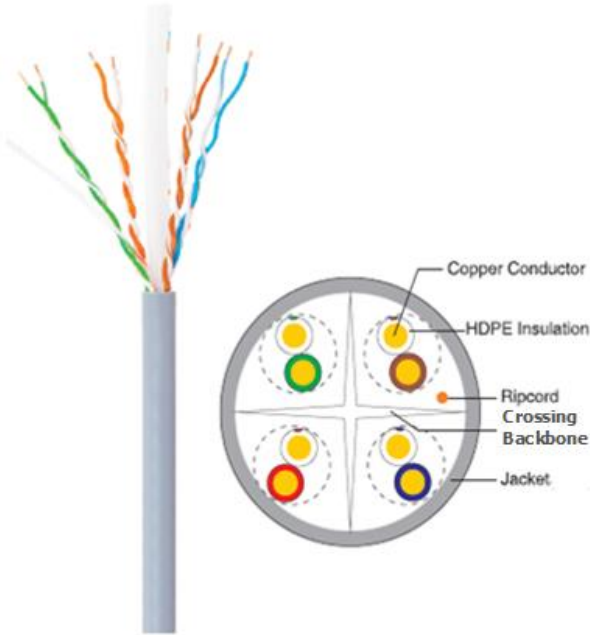


UTP Category 6A Cables

Content of Data Sheet				
Product model	UV-UTP6A-300-BC23AWG-DCA-R-W			
Product specification	Cat6A. U/UTP. 4×2×0.55mm			
Test Standard	ISO/IEC11801 ED.2 ANSI/TIA-568-C.2			
Conductor	Material	OFC		
	AWG	23		
	Nom.O.D.(mm)	0.55±0.005 mm		
	DC resistance	≤95Ω/km		
Insulation	Material	HDPE		
	Thinkness	0.21+0.03mm		
	Diameter	0.98±0.05 mm		
	Color	Blue/White- Blue	Green/White-Green	
		Orange /White-Orange	Brown/White-Brown	
Pitch	Twist Pitch	≤25mm		
	Cable Pitch	≤120mm		
Sheath	Material	LSZH (EN13501-6 DCA)		
	Fire Resistance	CPR Dca		
	External O.D.	6.0±0.3 mm		
	Color	White		
	Tensile strength	>10 Mpa		
	Thickness	0.55±0.15 mm		
Surface Printing	Letter height	3.0±0.3 mm		
	Color	Black		
	Print error & Space	1±0.005 m		
Packing	Packing	Reel		
	Once packing dimension	380mm*200mm*200mm		

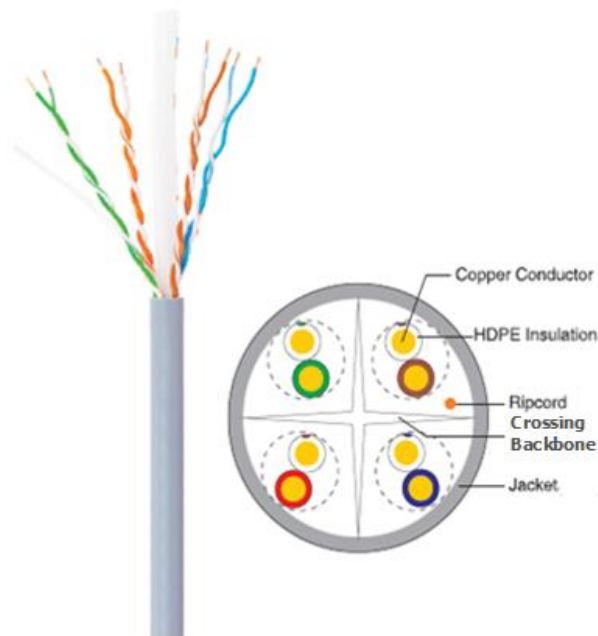

length	305±1 m		
Rip-cord	Yes	Crossing Backbone	Yes
Ambient temperature	-20°C ~ 75°C		

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.